


CONNECT TO THE FUTURE of PORTABLE POWER.

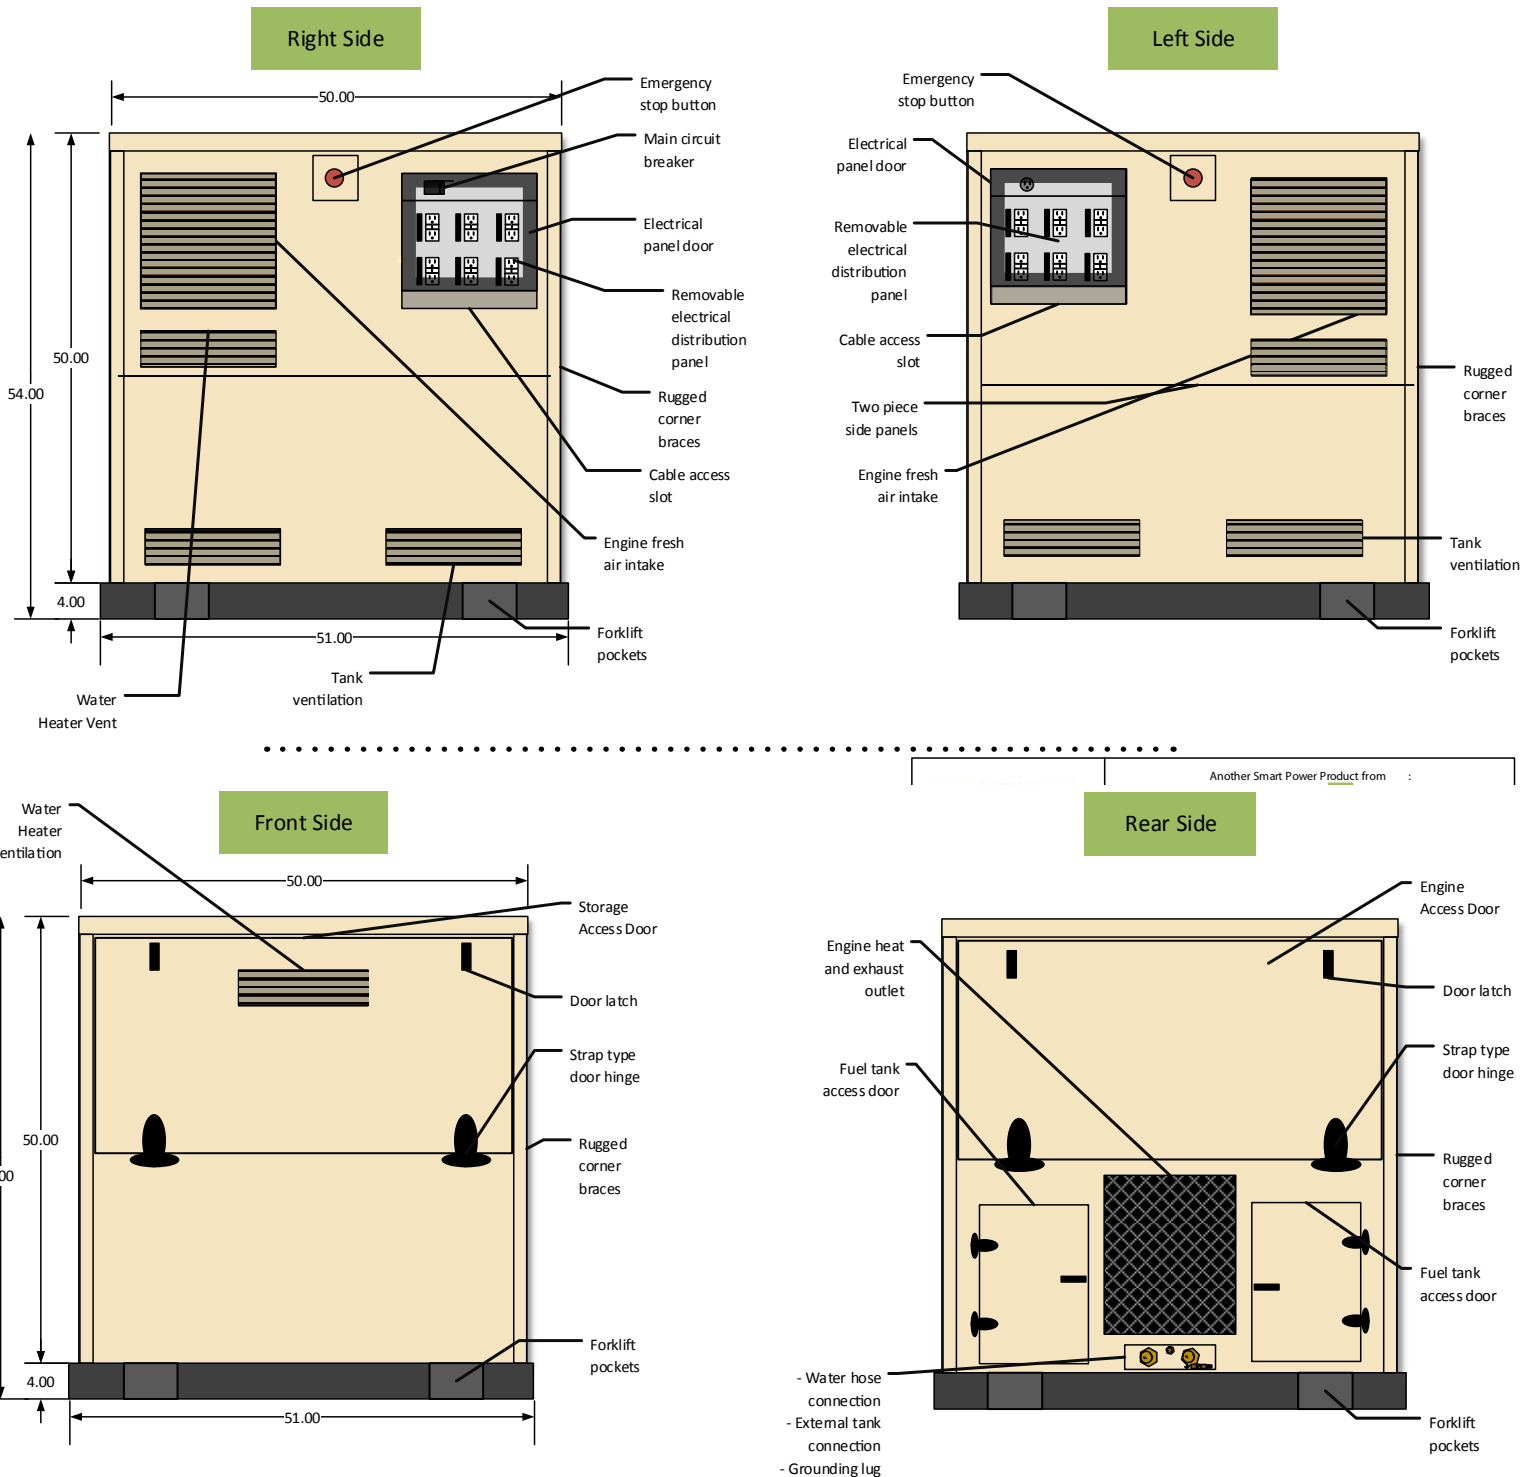

THE FUTURE OF POWER HAS ARRIVED.

With these features, you'll discover newer, better ways to power your event or work site.

DIMENSIONS:

50"l x 50"w x 54"h
(fork base maximum width 51")
Weight: 1776 dry 2015 fueled.

MULTI FUNCTION ELECTRICAL DISTRIBUTION PANELS

20kW @ 120/208 with various single/three phase output options
(6) 20A 120V GFCI receptacles,
(3) 30A 120V RV plugs,
(3) L-21-20 three phase plugs,
(2) L-21-30 three phase plugs,
(1) 50A 120/240V twist lock,
or hard wire.

VAPOR GAS AIR-COOLED ENGINE

Reduce the chance of spills and keep the site more eco-friendly with reduced emissions.

Engine: 996cc air cooled
Oil Capacity: 2.43 US qts
Sound: 65db @ 21'.

EXTENDED RUN ON BOARD FUEL TANKS

Up to 64 hours of operation between refuels
Fuel Capacity: 64 US gals LPG.
Fuel Consumption:
1 ghp @ 10% load to 3 ghp @ 100% load.

ON DEMAND HOT WATER

Continuous hot water for cooking, cleaning, and other uses. Great for emergency response and food-related events.
Hot Water Output: 1.6 gpm @ 45F rise.

MODULAR DESIGN

24 EverGreen generators fit on one 48' semi truck. Single unit trailer option available.

EASY PLACEMENT

Place EverGreen on your site using a forklift or crane making theft very difficult.

INTEGRATED STORAGE

Ship cable needed for the job with the EverGreen. No need to ship or handle separately.

EXTERNAL FUEL TANK CONNECTION

Connect EverGreen to a larger fuel tank for less frequent refuels.

GAS LEAK DETECTION AND SAFETIES

Emergency stop buttons and self-monitoring system keep EverGreen safe if a vapor gas leak is detected.



THE FUTURE OF PORTABLE POWER REFINED: 4TH GENERATION

GPS tracking
Remote start/stop
Low battery self-charging feature
Improved engine/generator monitoring system
Enhanced trouble fault reporting and low fuel warning system
Brushless three phase output generator
External fuel tank selector switch
Enhanced engine speed control system
Revised and improved LPG tank ventilation system

Improved engine/generator warranty
Oil change intervals have been extended from 250 hours to 500 hours
New enclosure with better ventilation and improved serviceability features
New screenprinted graphics scheme
Roof mounted 4 point lifting tabs (optional)



ENERGY TREE® LLC • P.O. BOX 168 • EUREKA, MO 63025
INFO@ENERGY-TREE.COM • 844-KILOWATT • WWW.ENERGY-TREE.COM